


**PROCEDIMIENTO PARA AUMENTAR LA MEMORIA DE LA BASE DE DATOS SQL ANYWHERE**

**Nota:** Para realizar el cambio se debe tener **la aplicación del SISPER cerrada**.


Este **cambio se realizará por única vez**.

1. Para ingresar al **ODBC del Windows** :  
Ingresar a **Menú inicio**, seleccionar **Ejecutar**


Si es **Windows de 32 bits**: escribir **%SystemRoot%\system32\odbc32.exe**

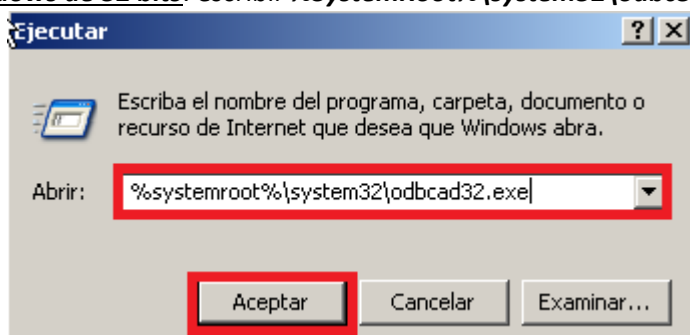

Si es **Windows de 64 Bits**: escribir **%SystemRoot%\SysWOW64\odbcad32.exe**

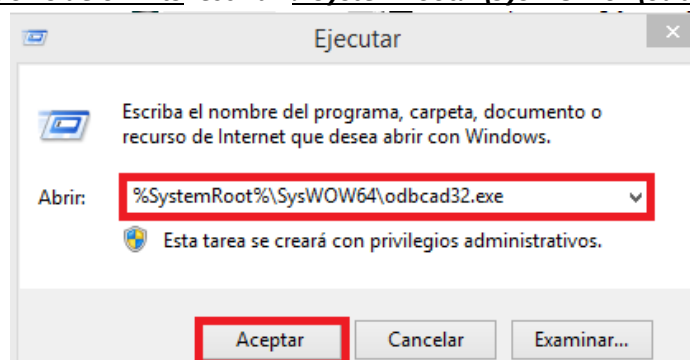

2. Se mostrará la Ventana del ODBC, dependiendo de la configuración de algunas PC ingresar a la Pestaña DSN de Usuario o DSN de Sistema seguidamente seleccionar **planilla\_diper** y dar click en **configurar**

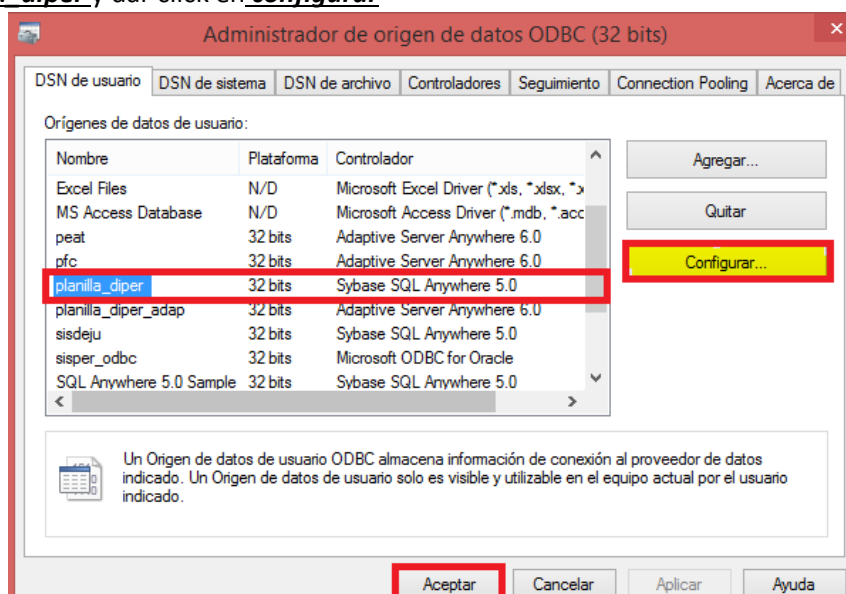

3. Se mostrará la Ventana de configuración, dar click en el botón **Options...**

The screenshot shows the 'SQL Anywhere ODBC Configuration' dialog box. It has several sections: 'Data Source Name' (planilla\_diper), 'Description' (empty), 'Connection Information' (User ID, Password, Server Name: <default>, Database Name: BD), 'Database Startup' (Database File: C:\sisper\SISPER.DB, Local, Network, Custom selected), and 'Additional Connection Options' (Translator Name: <No Translator>, Microsoft Applications, Prevent Driver not Capable errors, Delay AutoCommit). The 'Options...' button is highlighted with a red rectangle.

4. En el cuadro de **Start Command:** agregar al final **-c 100m** y dar click en el botón **OK**

The screenshot shows the 'Startup Options' dialog box. The 'Start Command' field is highlighted with a red rectangle and contains the text '5.0\win32\dbeng50.exe -c 100m'. Other fields include 'Database Switches' (empty), 'Agent' (Not Specified, Client, Engine), 'Autostop Database' (checked), 'Isolation Level' (empty), and 'Describe Cursor Behaviour' (Never, If Required, Always). The 'OK' button is highlighted with a red rectangle.

5. Se volverá a mostrar la Ventana de configuración, y dar click en **OK**

The screenshot shows the 'SQL Anywhere ODBC Configuration' dialog box again. The 'OK' button is highlighted with a red rectangle. The configuration is the same as in the previous screenshot.

6. Ingresar al Sistema SISPER de manera habitual